

Mark Scheme for June 2011

OCR (Oxford Cambridge and RSA) is a leading UK awarding body, providing a wide range of qualifications to meet the needs of pupils of all ages and abilities. OCR qualifications include AS/A Levels, Diplomas, GCSEs, OCR Nationals, Functional Skills, Key Skills, Entry Level qualifications, NVQs and vocational qualifications in areas such as IT, business, languages, teaching/training, administration and secretarial skills.

It is also responsible for developing new specifications to meet national requirements and the needs of students and teachers. OCR is a not-for-profit organisation; any surplus made is invested back into the establishment to help towards the development of qualifications and support which keep pace with the changing needs of today's society.

This mark scheme is published as an aid to teachers and students, to indicate the requirements of the examination. It shows the basis on which marks were awarded by Examiners. It does not indicate the details of the discussions which took place at an Examiners' meeting before marking commenced.

All Examiners are instructed that alternative correct answers and unexpected approaches in candidates' scripts must be given marks that fairly reflect the relevant knowledge and skills demonstrated.

Mark schemes should be read in conjunction with the published question papers and the Report on the Examination.

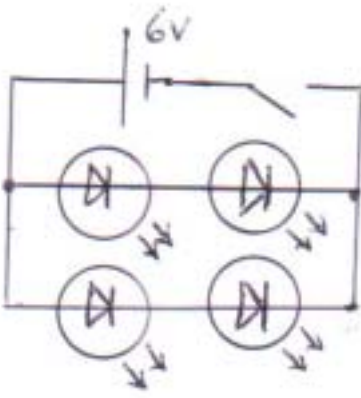
OCR will not enter into any discussion or correspondence in connection with this mark scheme.

© OCR 2011

Any enquiries about publications should be addressed to:

OCR Publications
PO Box 5050
Annesley
NOTTINGHAM
NG15 0DL

Telephone: 0870 770 6622
Facsimile: 01223 552610
E-mail: publications@ocr.org.uk

Question		Expected Answers	M	Additional Guidance
1				
	a	i		
		read off value of current (at $V = 6.0 \text{ V}$)	B1	any reference to using gradient scores 0/2
		calculate R using V/I	B1	accept $I = 0.25 \text{ (A)}$ or 250 (mA)
		ii	B1	accept not a straight line; R is not constant
	b	i	B1	ecf(b)(i) ecf b(ii) accept $2.2 \times 10^4 \text{ J}$; allow 360 J for 1 mark only
		ii	B1	
		iii	C1 A1	
	c	i	B1	or energy transfer/charge; work done /charge
		ii	B1	or across LED
		iii	A1	
		Use of $P = VI$	M1	$3 \times 0.030 = 0.090 \text{ W}$ per LED so 0.090×4
		suitable method (may be expressed purely in numerical form)	A1	or 30 mA in two branches at 6 V or total current is 60 mA from 6 V battery
		$= 0.36 \text{ W}$	A0	
		iv	B1	symbol for LED
			B1	correct orientation of LED
			B1	correct circuit
	d	draws a lower current/ light lasts longer (before battery discharged)/AW	B1	allow lower power consumption/AW
		or LEDs more efficient (at converting electrical energy into light)		
		or if one LED fails there are still two lit		
		or more robust/longer working life		
		Total question 1	16	

Question		Expected Answers	M	Additional Guidance
3				
	a	energy per unit area per unit time	B1	accept power per unit area; allow second for unit time
	b	Small <u>changes</u> in R for high light intensities/daylight conditions Large <u>changes</u> in R for low light intensities/dim light/night time conditions to change circuit state need a significant change in R to be useful/reliable	B1 B1 B1	accept low R by day, high R by night for 1 mark NOT comparison e.g. R by day smaller than R at night max 2 marks from 3 marking points
	c	i 2.5 (k Ω) ii 5.0 = I x 2.5 k Ω giving I = 2.0 x 10 ⁻³ A iii 4.0 = 2.0 x 10 ⁻³ x R or potential divider argument giving R = 2.0 x 10 ³ Ω	A1 C1 A1 M1 A0	allow 2.4 to 2.6 ecf (c)(i) accept 2.0 mA ecf (c)(ii) or ecf (c)(i) accept 2.0 k Ω
	d	R (of LDR) = 1(.0 k Ω) potential divider of 1.0 k Ω and 2.0 k Ω giving 3.0 V across LDR	B1 C1 A1	accept I = 3.0 (mA) so V = 3.0 (mA) x 1.0 (k Ω) = 3.0 V
	e	light shining on the LDR will cause it to switch the illumination off causing an ON/OFF oscillation/AW	B1 B1	two suitable qualifying statements for the 2 marks
Total question 3			12	

Question		Expected Answers	M	Additional Guidance
4				
	a	i		
		photoelectric effect/emission	B1	
		ii1	B1	
		the <u>minimum</u> energy (required) to release an electron (from the surface of the metal)		
		ii2	C1	
		$3.5 \times 10^{-19} = 6.6 \times 10^{-34} f$	A1	
		$f = 5.3 \times 10^{14}$ (Hz)		
		iii	C1	
		$\epsilon = hc/\lambda = 6.6 \times 10^{-34} \times 3.0 \times 10^8 / 4.2 \times 10^{-7}$	A1	no second mark unless there is evidence of the calculation being done
		$= 4.7 \times 10^{-19}$ (J)		
		iv	C1	
		$\frac{1}{2}mv^2 = 4.7 \times 10^{-19} - 3.5 \times 10^{-19}$	A1	mark for using the p.e. equation
		$= 1.2 \times 10^{-19}$ (J)		accept 1.5×10^{-19} from those using 5×10^{-19} J
	b	i1	B1	
		12 (eV)		
		ii2	A1	ecf(b)(i)1
		$\epsilon = eV = 12 \times 1.6 \times 10^{-19} = 1.92 \times 10^{-18}$ (J)		
		ii	C1	$\frac{1}{2}mv^2 = 12$ scores 0/3
		$\frac{1}{2}mv^2 = 2.0 \times 10^{-18}$	C1	accept 1.9×10^{-18} from (b)(i)2
		$v^2 = 2 \times 2.0 \times 10^{-18} / 9.1 \times 10^{-31} = 4.4 \times 10^{12}$	A1	giving $v = 2.0(5) \times 10^6$
		$v = 2.1 \times 10^6$ (m s ⁻¹)		
	c		C1	using 4.7×10^{-19} gives 2.55×10^{10}
		e's emitted/s = $1.2 \times 10^{-8} / 5 \times 10^{-19} = 2.4 \times 10^{10}$	C1	omitting 1% scores as a POT error
		current = $2.4 \times 10^{10} \times 1.6 \times 10^{-19}$	A1	allow 4 nA as the question states 'estimate'
		= 3.8×10^{-9} (A) to 4.1×10^{-9} (A)		
		Total question 4	16	

Question		Expected Answers	M	Additional Guidance
5				
	a	i	0.60 m	B1 allow 0.6 another example of SF comment Q2
		ii1	the wave has moved along 0.5 wavelengths in 0.75 ms so will move one wavelength in 1.5 ms which is the period/AW	B1 can be answered in terms of phase
		ii2	f = 670 Hz so v = fλ = 670 x 0.60 = 400 (m s ⁻¹)	C1 ecf(a)(i) A1 accept v = λ/T = 0.60/1.5 x 10 ⁻³
	b		0	B1
	c	i	<i>displacement</i> any distance moved from equilibrium of a point/particle (on a wave) <i>amplitude maximum</i> possible <u>displacement</u> (caused by wave motion)	B1 allow alternatives for equilibrium, e.g. mean/rest/undisturbed position B1
		ii	<i>progressive</i> a wave which transfers energy <i>stationary</i> a wave which <u>traps/stores</u> energy (in pockets) OR <i>progressive</i> : transfers shape/information from one place to another <i>stationary</i> where the shape does not move along/which has nodes and antinodes/AW	B1 accept phase relationship descriptions between different points on wave; B1 must be a comparison for same property to score both marks B1 B1
	d	i	the incident wave is <u>reflected</u> at the fixed ends of the wire reflected wave <u>interferes/superposes</u> with the incident wave to produce a resultant wave with nodes and antinodes/no energy transfer	B1 must have reference to an end of the wire B1 QWC mark B1
		ii1	0.70 (mm)	B1 allow 0.60 to 0.80 mm
		ii2	0.15 (m)/0.45 (m)	B1 anywhere on vertical line x = 0.15 or 0.45
		ii3	x = 0.2, y = -1.7	B1
Total question 5			15	

Question			Expected Answers	M	Additional Guidance
6					
	a	i	method of producing coherent sources at S_1 and S_2 light (waves) from the two slits/sources must be coherent; that is, they must have a constant phase relationship/difference slits must be narrow/close together (so that diffraction patterns overlap) light (waves) from two slits must have similar amplitudes/intensities	B1 B1 B1 B1 B1	e.g. initial single slit max 3 marks from 5 marking points
		ii	<i>bright</i> : constructive interference occurs/waves add to give a maximum amplitude at the screen path difference between slits and screen is a whole/integer number of wavelengths/waves arrive in phase at screen <i>dark</i> : destructive interference occurs/waves add to give a minimum amplitude/zero at the screen path difference between slits and screen is an odd half number of wavelengths/waves arrive out of/in antiphase at screen	B1 B1 B1 B1	accept explanation in terms of distance or phase accept explanation in terms of distance or phase
	b	i	$7.4/5 = 1.48 \times 10^{-3}$ (m)	B1	accept 1.5 mm
		ii	$\lambda = xd/L$ $= 1.48 \times 10^{-3} \times 0.6 \times 10^{-3}/1.5$ $= 5.9(2) \times 10^{-7}$ (m)	C1 C1 A1	using 1.5 mm gives 600 nm ecf(b)(i) e.g. 4.92×10^{-7} for 1.23 mm accept 590 nm
	c		pattern/fringes vanish because there is now no interference from light from the two slits/AW light spreads out over whole/similar region light intensity (at screen) is less diffraction spreads light simple description of single slit pattern further features of single slit pattern	B1 B1 B1 B1 B1 B1 B2	 e.g. bright in middle and dim at edges/sketch of bell shape max 3 marks from 8 marking points
Total question 6				14	

Question		Expected Answers	M	Additional Guidance
7				
	a	reference to a transverse wave or to vibrations in plane normal to the direction of (energy) propagation <u>oscillations/vibrations</u> in one direction only/confined to single plane (containing the direction of propagation)	B1 B1	can be answered with suitable diagram(s) NOT the wave oscillating in one plane
	b	set up apparatus, e.g. tray of water on table with lamp/light from window rotate the filter rotation of filter changes the image intensity/brightness/AW correct orientation for maximum and minimum intensities of image move head up or down to change angle of reflected light observed use of protractor to measure angles image/reflection becomes partially plane polarised/ image changes from bright to dim but does not disappear	B1 B1 B1 B1 B1 B1 B1	QWC mark essential for full marks allow from bright to zero or vice versa transmission axis parallel to water surface for maximum and perpendicular for minimum can hold head still and move lamp max 3 from 6 marking points + QWC mark
	c	$I = I_0 \cos^2\theta$ where I_0 is the maximum intensity (of the polarised beam) when θ is zero maximum intensity transmitted/ image bright when θ is 90° minimum/zero intensity transmitted/image dim/vanished	B1 B1 B1 B1	allow incident/original/initial for maximum
Total question 7			10	

OCR (Oxford Cambridge and RSA Examinations)
1 Hills Road
Cambridge
CB1 2EU

OCR Customer Contact Centre

14 – 19 Qualifications (General)

Telephone: 01223 553998

Facsimile: 01223 552627

Email: general.qualifications@ocr.org.uk

www.ocr.org.uk

For staff training purposes and as part of our quality assurance programme your call may be recorded or monitored

Oxford Cambridge and RSA Examinations
is a Company Limited by Guarantee
Registered in England
Registered Office; 1 Hills Road, Cambridge, CB1 2EU
Registered Company Number: 3484466
OCR is an exempt Charity

OCR (Oxford Cambridge and RSA Examinations)
Head office
Telephone: 01223 552552
Facsimile: 01223 552553

© OCR 2011

